



KR AUDIO ELECTRONICS HI VACUUM TUBE

KR 300B

General data

Filament specifications:	DC/AC Voltage	5 V
	DC/AC Current	1.2 A

Amplification Factor	3.9
----------------------	-----


Power Amplifier class A1

Maximum

DC Plate Voltage	550 V
Dissipation	50 W
DC Plate Current	120 mA

DC Plate Voltage	450 V
DC Plate Current	100 mA
Grid Voltage	-90 V
Plate Resistance	630 ohm
Transconductance	6,2 mA/V

CONNECTION OF THE VALVE BASE KR300B

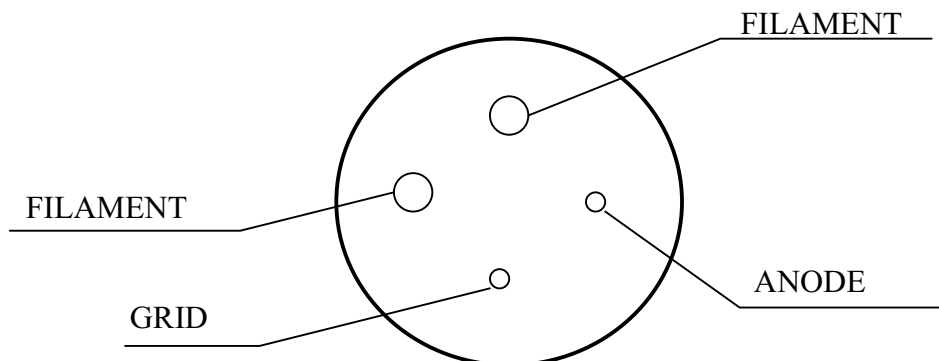

VIEW FROM BELOW

KR AUDIO USA, Harwil Group
Exclusive USA Distributor
8390 E. Via De Ventura
F110-194
Scottsdale, Arizona 85258
1-888-593-8488 x121
www.kraudiousa.com

Plate characteristics KR300B

